


4SDM Series

ELECTRIC SUBMERSIBLE BOREHOLE PUMP

PERFORMANCE SPECIFICATIONS

Model	Power		Q.max. L/min	H.max. m	Voltage v	Hertz Hz
	HP	kW				
4SDM2/7	0.5	0.37	95	51	220	50
4SDM2/9	0.75	0.55	95	65	220	50
4SDM2/11	1.0	0.75	95	80	220	50
4SDM2/16	1.5	1.1	95	116	220	50
4SDM2/19	2.0	1.5	95	138	220	50
4SDM2/22	3.0	2.2	95	160	220	50

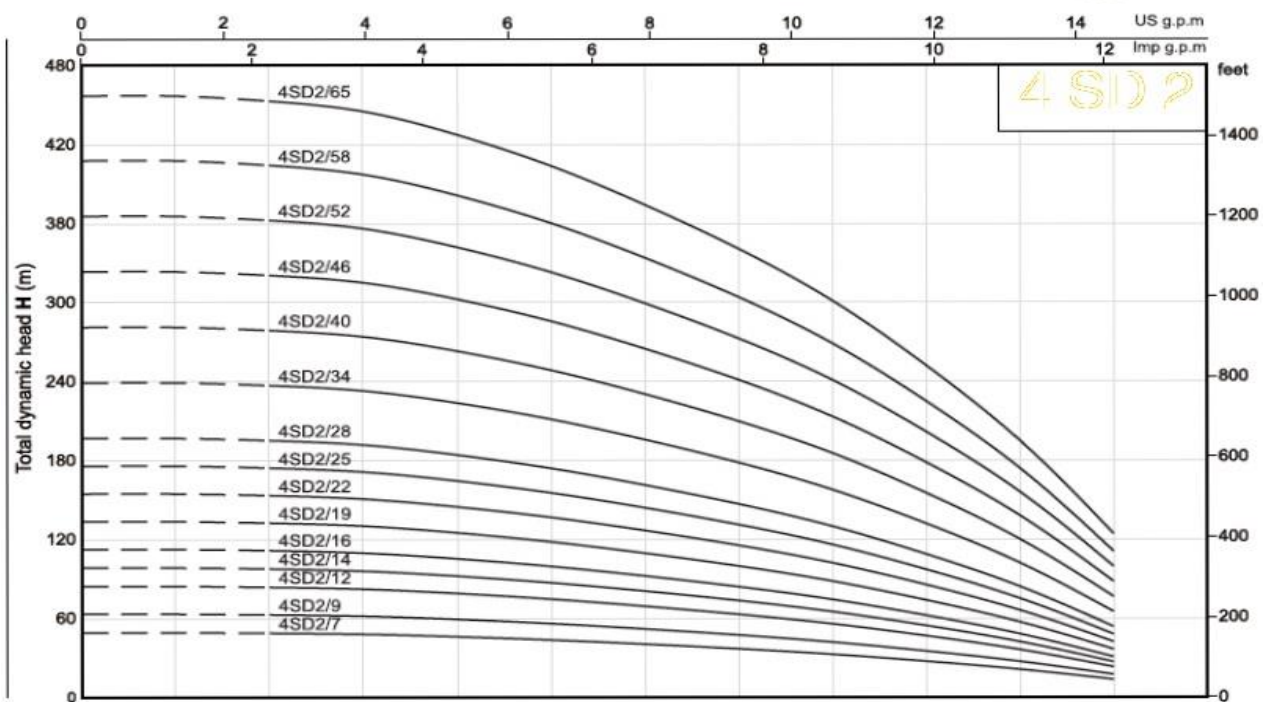

PUMP

The Lamasat 4SDM Submersible Borehole Pump is ideal for water supply from boreholes, wells, or reservoirs. It is used for domestic, civil, and industrial applications -- as well as garden use and irrigation.

OPERATING CONDITIONS

Maximum Fluid Temperature: up to 35°C

Maximum Sand Content: 0.25%

Minimum Well Diameter: 4"

MOTOR

Single-phase: 220~240V/50Hz

Equipped with 2m blue flat cable and start control box

FEATURES

Outlet & Connector: Brass

Impeller: Plastic

Wire: 100% Copper

Body: Stainless Steel 201

LAMASAT

