


# QDX Series

## ELECTRIC SUBMERSIBLE WELL PUMP



### OVERALL DIMENSIONS AND PERFORMANCE SPECIFICATIONS

Model	Power		Q.max. L/min	H.max. m	Voltage v	Speed r.p.m	Inlet/Outlet inch	DIMENSIONS (mm)			
	HP	kW						Length	Width	Height	Weight (kg)
QDX1.5-17-0.37	0.5	0.37	25	11	220	2860	1"	400	220	190	8.6
QDX1.5-25-0.55	0.75	0.55	25	15	220	2860	1"	420	240	220	11.1
QDX1.5-32-0.75	1.0	0.75	25	20	220	2860	1"	440	260	240	13.2
QDX30-9-1.1	1.5	1.1	333	9	220	2860	3"	460	280	260	14.9
QDX15-20-1.5	2.0	1.5	250	15	220	2860	2.5"	480	300	280	16.3

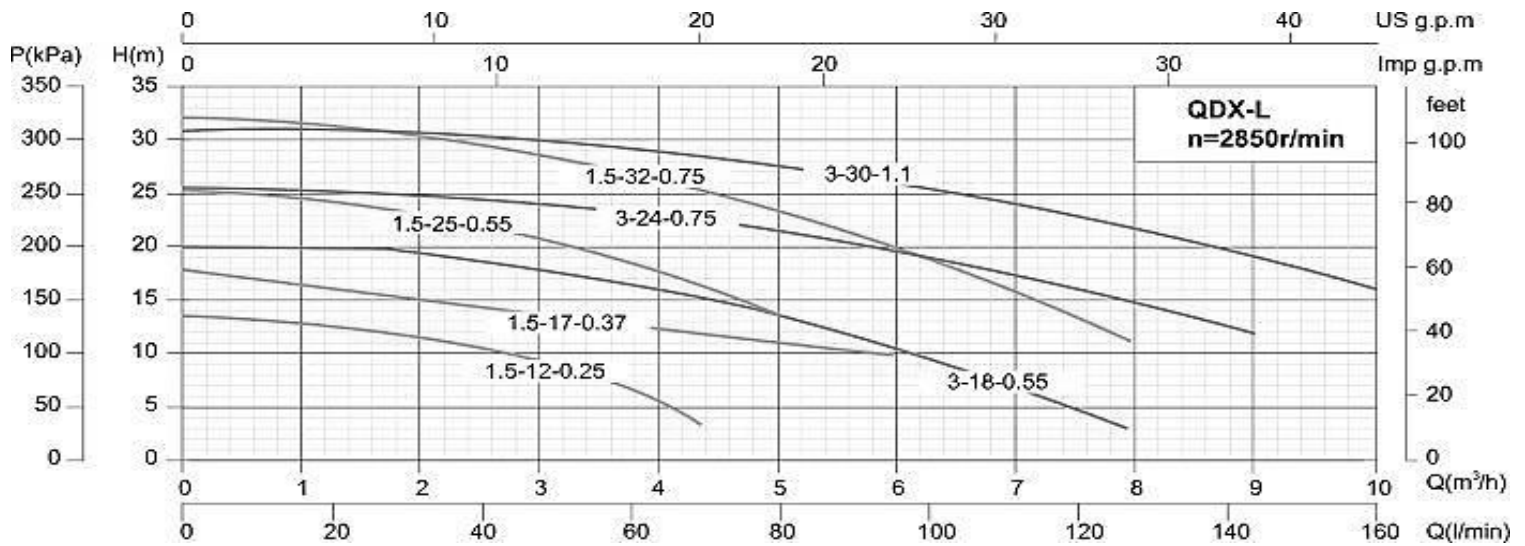

### PUMP

The Lamasat QDX Submersible Well Pump is ideal for small electrical irrigation and drainage, urban well water pumping, garden irrigation, and household water supply. This pump is also suitable for drainage of industrial accumulated water, water supply and drainage for construction, as well as livestock breeding.

### FEATURES

Outlet & Connector: Iron

Impeller: Aluminium

**Wire:** 100% Copper **Body:** Aluminium

Supplied with 8m Cable and Float Switch

Stainless Steel Welded Shaft

Built-in Thermal Protector

### OPERATING CONDITIONS

Max. Liquid Temperature: +40°C

Liquid PH Value: 6.5-8.0

Insulation Class: B

Protection Class: IP68

# LAMASAT

